

2-WAY GENERAL PURPOSE SOLENOID VALVES

SV120 Series



- ✓ Stainless Steel Valve Body Resists Corrosion
- ✓ Rugged NEMA 4 (IP65) Housing
- ✓ Mounts in Any Position
- ✓ Rated for Continuous Duty
- ✓ High-Pressure Models

TYPICAL APPLICATIONS

- ✓ Automation
- ✓ Humidifiers
- ✓ Water Treatment
- ✓ Dispensing
- ✓ Laundry, Dry Cleaning Equipment
- ✓ Machine Tools
- ✓ Vending Machines

The direct-acting SV121 to SV127 solenoid valves consist of a coil, plunger, and sleeve assembly. In a normally closed state, a plunger return spring holds the plunger against the orifice, preventing flow through the valve. When current flows through the coil, a magnetic field is produced and it turns the stop into an electromagnet that attracts the magnetic plunger. This action compresses the return spring, allows the body orifice to open, and permits fluid flow through the valve. The pressure and flow capabilities of the direct-acting valves are limited by the power of the solenoid.

The SV128 is a pilot-operated solenoid valve. It uses the energy stored in the pressurized fluid to actuate the valving mechanism. The valves require the minimum pressure differential specified for proper valve operation. A direct-acting solenoid valve is an integral part of the pilot-operated valve and is used to affect the balance of pressure above and below a diaphragm or piston.

SV121, shown close to actual size.



SV126, \$115, shown close to actual size.

DIRECT-ACTING OR PILOT-OPERATED SOLENOID VALVES, NORMALLY CLOSED, STAINLESS STEEL VALVE BODY

Note: 5 to 11 psi is the operating pressure range for bubble-tight sealing. Valves may leak if the pressure differential falls below 5 psi.



SPECIFICATIONS

Operation:

SV121 to SV127: Direct acting
SV128: Pilot operated

Wetted Parts: Stainless steel, copper and seal
Medium: Liquid or gases
Max Static Pressure: 1.5 times max psid, vacuum (>5 microns ABS)
Ambient Temp: -9 to 50°C (15 to 122°F)

Mounting: Pipe mounting, any direction
Power: 10 W, 120 Vac coils, 50 to 60 Hz
Weight: 500 g (1.1 lb)

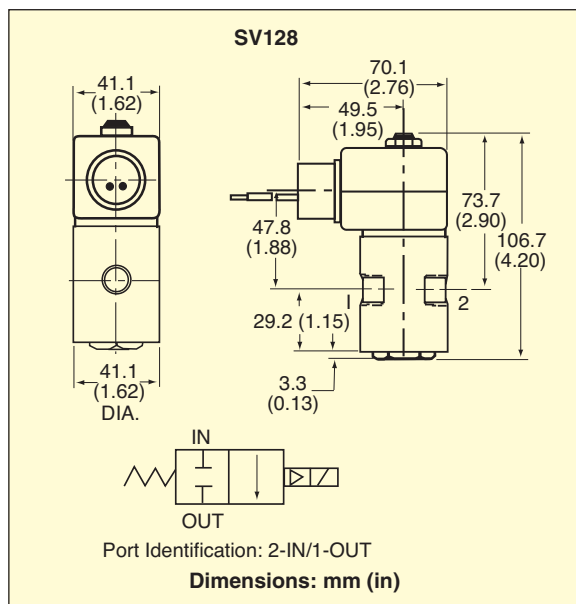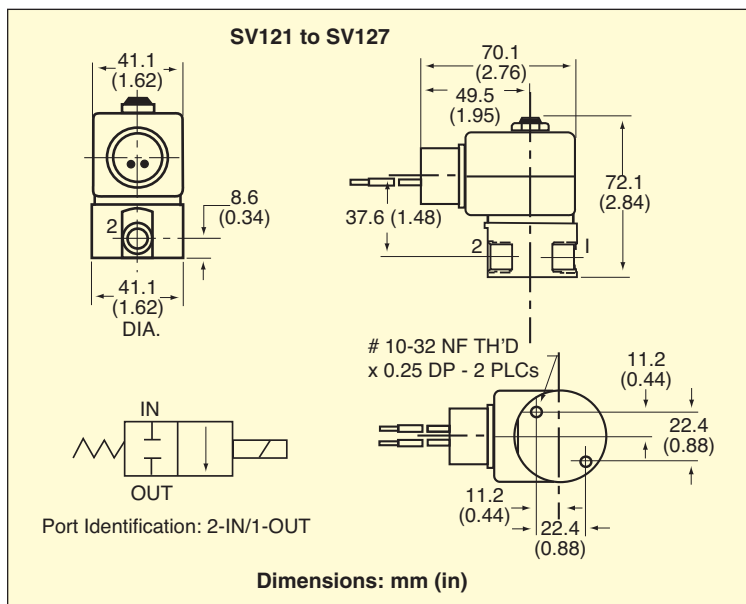

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

MODEL NO.	PRICE	NPT FITTING	ORIFICE	C _v	SEAL	DIFF PRESSURE (psid)		TEMP		RESPONSE TIME	
						MIN	MAX	°C	°F	OPEN	CLOSE
SV121		¼	¾"	0.06	KEL-F	0	1000	74	165	4 to 15 ms	4 to 15 ms
SV122		¼	¾"	0.06	FKM	0	450	116	240	4 to 15 ms	4 to 15 ms
SV123		¼	¼"	0.10	FKM	0	350	116	240	4 to 15 ms	4 to 15 ms
SV124		¼	¾"	0.18	FKM	0	275	116	240	4 to 15 ms	4 to 15 ms
SV125		¼	½"	0.28	FKM	0	200	116	240	4 to 15 ms	4 to 15 ms
SV126		¼	½"	0.40	FKM	0	90	116	240	4 to 15 ms	4 to 15 ms
SV127		¼	¼"	0.75	FKM	0	40	116	240	4 to 15 ms	4 to 15 ms
SV128*		¼	¼"	0.76	PTFE	5	1500	99	210	30 to 60 ms	30 to 60 ms

Comes complete with operator's manual.

ACCESSORIES

MODEL NO.	PRICE	DESCRIPTION
SVCOIL-110AC		Replacement coil, 110 Vac
SVCOIL-220AC		Replacement coil, 220 Vac
SVCOIL-24VDC		Replacement coil, 24 Vdc

* Pilot operated.

Note: Some solenoid valves are available with 24 Vdc coils. Five piece minimum order. UL approval is not available with 24 Vdc coils. Specifications effected; pressure ratings may decrease; coil wattage ratings may increase. Consult Engineering.

Ordering Examples: SV121, direct-acting stainless steel normally closed valve with ¾" orifice and KEL-F seal.

SV128, pilot operated stainless steel normally closed valve with ¼" orifice and PTFE seal.

Recommended Reference Book:
 Valve Handbook,
GE-2317. See
 Section Y
 For Additional Books

